


Visit Us Online

For more information about Basalite paving stones, retaining walls, accessories, patterns or installation instructions, visit us online at basalite.com.

Offered by:



605 Industrial Way
Dixon, CA 95620
800-776-6690

11888 West Linne Road
Tracy, CA 95376
800-776-6690

1201 Golden State Blvd
Selma, CA 93662
559-896-0753

CALIFORNIA • COLORADO • IDAHO • NEVADA • OREGON • WASHINGTON • BRITISH COLUMBIA

www.basalite.com



©2012 Basalite® Concrete Products, LLC. All trademarks ® are registered trademarks. Stonewall® II is a registered trademark of WestBlock Systems and a licensed product of WestBlock Development, LLC. Stonewall® II is protected under U.S. Patent D652.153, D652.154, D652.155, D652.531. Additional Patents pending in the U.S. and Canada. The U.S. Green Building Council Member logo is a trademark owned by the U.S. Green Building Council and is used by permission.

BA000 000 GSL 5/17/12



STONEWALL® II

Patents Pending

ACCESSORIES



www.basalite.com

STONEWALL® II



Patents Pending

Fire Pit Kit


There are few things in life as relaxing as sitting by a warm fire on a cool evening. Our StoneWall® II Fire Pit Kit is an easy to install project that includes all of the materials you will need to build your own intimate campground. *All you'll need are the marshmallows!*

Specifications

Available as a 15" tall kit (two courses plus cap), or a 21" tall kit (three courses plus cap). 15" kit contains fifty-eight (58) 6/4 blocks and 14 caps. 21" kit contains eighty-seven (87) 6/4 blocks and 14 caps. Please contact your local dealer or Basalite representative for more information. Available in Positano and Venice colors only.

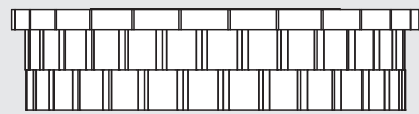

Style: 6/4 Trapezoid
Weight: 21 lbs



Style: Cap
Weight: 24 lbs

Installation Instructions

1. Level the Pad

Level a 60-inch circular area of gravel or rock on compacted soil, with the top of the pad being 3 inches below grade.

2. Lay Out the Circle

Measure 60 inches across the circular pad, placing a stake at the half way mark (30 inches). Using the center stake, measure out an 18-inch radius from the center stake. Place the blocks (29 units) so that the fronts of the blocks are on the measured, 18 radius line. The blocks may need to be adjusted to fit tightly. Level the blocks front to back and side to side with a small "torpedo" level.

3. Install the Second Row

Place the blocks (29 units) on top of the bottom course, staggering the intersection of two blocks on the row below. Continue around the circle, making slight adjustments as needed, so that the blocks fit tight in the circle. If you are constructing a 3-ring fire pit, repeat the instructions for installing the 2nd course.

4. Optional Steel Ring

Place the ring on the ground and using the bolts provided, bolt the two sides together. Install the ring in the center of the blocks; install approximately 2 inches of course rocks inside the fire ring. Once the fire ring is in place, remove the blocks one at a time and apply glue to secure them in place.

5. Install the Caps

Place the first cap unit directly over one of the blocks; continue around the circle making slight adjustments as needed so the caps fit tightly in a circle. Once they are in place, remove them one at a time and apply glue to secure them in place. Place clean rock between the metal ring and the blocks.

STONEWALL® II



Patents Pending

Freestanding Column Kit


Basalite's StoneWall II Freestanding Column Kits are the perfect way to accent your freestanding wall with beautiful end columns.

Specifications

Each column is 21" x 21" square. There are 24 pieces of each sized block on the pallet, for a total of 48 blocks. The kit will make two (2), 3-foot-tall columns.

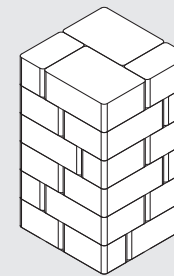

Style: 6" Rectangle
Weight: 28 lbs



Style: 15" Rectangle
Weight: 70 lbs

Installation Instructions

1. Excavate the Base Trench*

Excavate trench 20" wide and 12" deep along the length of wall, assuring depth provides proper unit embedment. On sloped sites, step up 6" to change elevation.

2. Prepare the Base Leveling Pad & Compact*

Place 6" of 3/4"-1/2" crushed aggregate in the trench. Level, then compact to 95% or greater of standard proctor.

3. Set & Align Base Course*

Starting at a level elevation place and level the block using a torpedo level and a 2' level, checking front to back and side to side. Follow the pattern as shown. Lay out the bottom course before proceeding to the next courses. Stack additional courses altering the pattern course to course. Repeat the steps to reach the 3 foot column height.

4. Capping the Wall*

Adhere clean and dry cap blocks to the wall using silicon concrete construction adhesive. Place cap flush to the wall face, or with an overhang.

*The installation instructions are a basic overview of the StoneWall II installation. Because of the variety of applications, please refer to local building codes, or visit us online at basalite.com.

Colors



Positano



Venice



Sienna



Milan



Naples



Tan Blend




Grey Blend

STONEWALL® II


Patents Pending

Wedge Kit

Basalite's StoneWall II Wedge Kits are designed for easy building of concave and convex curves. Kit contains 144 pieces.



Style: 6/4 Trapezoid
Weight: 21 lbs

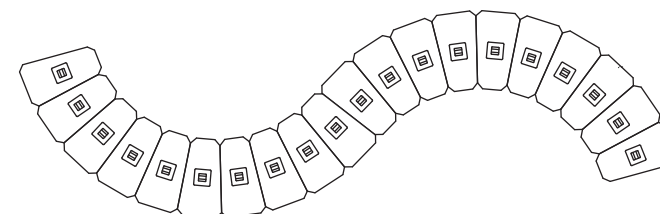

NOTE: Printed colors shown in this brochure may vary from actual product colors. We recommend color selection be made from actual product samples.